TN-28




TUBULAR EXTENDER

CE

Accessories for RFLS-28 high-frequency level sensors



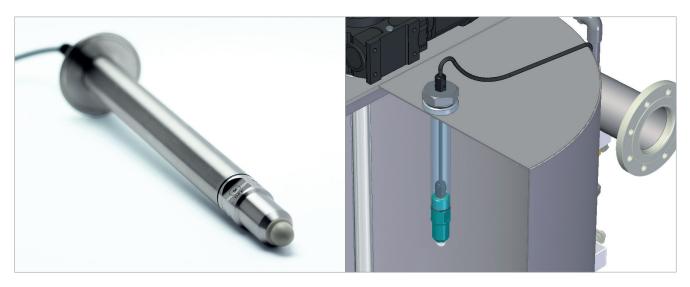

- The tubular extender is used for vertical • mounting of the RFLS-28 sensor in tanks, vessels and sumps
- Choice from three types of process connection: flange, G1" thread or Tri-Clamp


Cable gland

Minimum tubular extender length

Maximal tubular extender length

W. No. 1.4404 (AISI 316 L).

Standard material performance		
Tube 28 x 2.5		stainless steel W. No. 1.440 (AISI 316 L)
Process connection	Flange mounting	stainless steel W. No. 1.430 (AISI 304)*
	G1" thread	stainless steel W. No. 1.430 (AISI 304)*
	Tri-Clamp	stainless steel W. No. 1.440 (AISI 316 L)
Seal under flange / threaded mounting		AFM 38
O-ring		NBR / EPDM / FPM

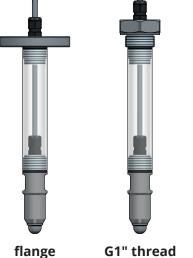






PA / NBR plastics

50 mm

3000 mm**

** If there is a stirrer in the tank, it is necessary to consult the length of the tubular extender with the manufacturer.


* By agreement, it is possible to choose stainless steel

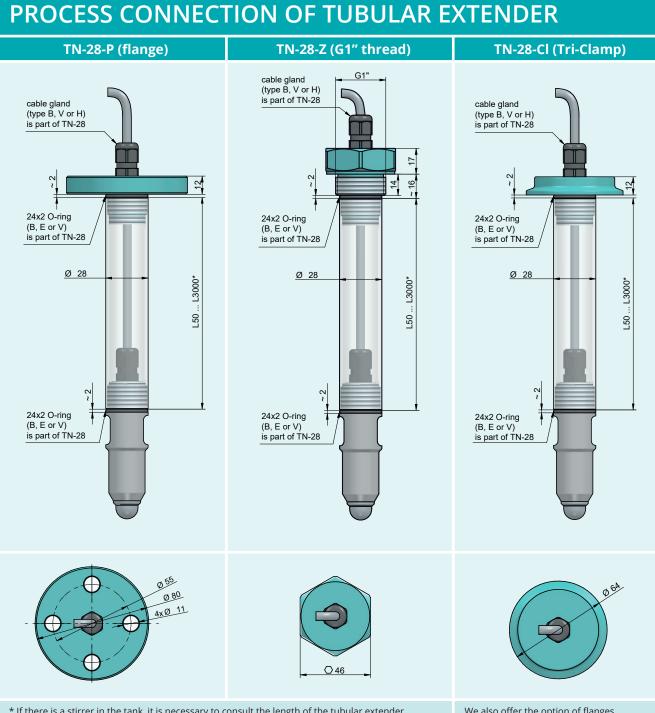

* If there is a stirrer in the tank, it is necessary to consult the length of the tubular extender with the manufacturer.


We also offer the option of flanges made-to-order.

TYPES OF CABLE GLANDS

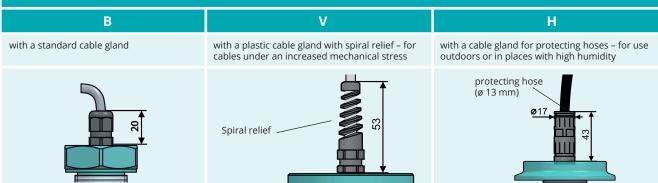

SEAL

ORDER CODE

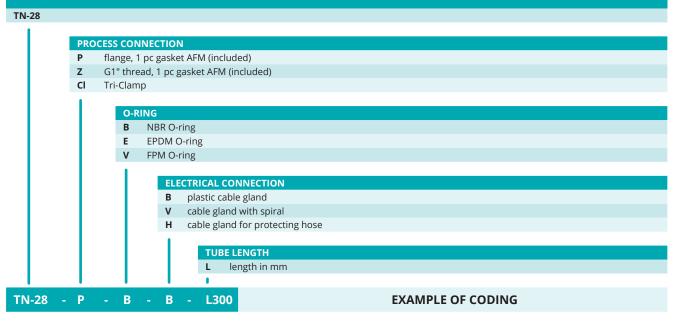

Dinel, s.r.o. U Tescomy 249, 760 01 Zlín, Czech Republic tel.: +420 577 002 003 email: sale@dinel.cz



version: 03/2021

www.dinel.cz